

**DUCT CONNECTION
LOW STATIC PRESSURE TYPE**

FD(Y)B

Cooling only FDB25—71

Top-class
noise attenuation

38dB
LOW
FDYB50
(220V)



FDYB50



Accessory required for indoor unit (option)

Cooling only

Digital remote controller



KRC47-2
KRC47-4

Remote controller



KRC47-1

- Ideal for quiet, beautiful living spaces
- Suitable for condominiums and apartments, houses and hotels, and similar living areas

Whisper Quiet


Top class quiet operation

Durable

To achieve increased durability by improved resistance to salt corrosion and atmospheric pollution, coated PE fins (with special acryl pretreatment) are used for the heat exchanger of the outdoor unit.


Handy

Small, lightweight, and easy-to-install outdoor unit.

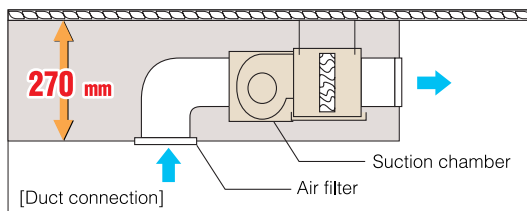

*To prevent increased operation noise, avoid installing the air suction grille directly below the suction chamber.

Supports simultaneous running of the triple and double twin multi operations.

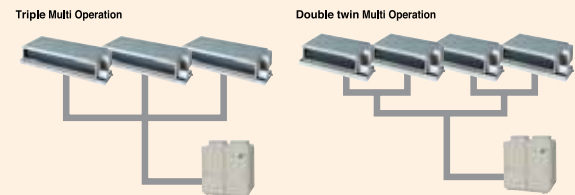

See pages 29—30 for details of the Multi Series.

Features (Features are explained on P. 39—40.)

Feature	Comfort						Work & Servicing				Control features				Others			
	Switchable fan speed	Program "Dry"	Hot start	Automatic cool/heat change-over	Year-round cooling applicable	Timer selector	Pre-charged for up to 30 m	Low gas pressure detection	Emergency operation	Self-diagnosis function	Auto-restart	Control by 2 remote controllers	Group control by 1 remote controller	External command control	Central remote control	Interlock control	Triple and double twin multi operation	PE fin
Cooling only	●	—	—	—	—	—	—	—	—	●	—	—	—	—	—	—	●	●